


# TRAVEL CLOCK MANUAL

VAC-1000

## Parts & Function

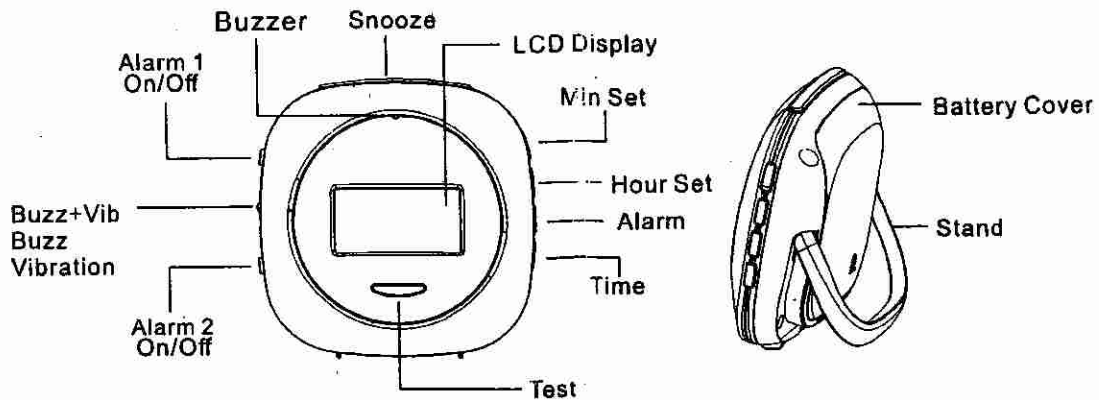


### 1. Power:

Open the battery cover, Insert main battery (2 x AA) with correct polarity as indication. Insert A backup battery (CR2032) with correct polarity as indication.

The backup battery maintain the clock running when you replace the main batteries.

The alarm sound and vibration can not work without main batteries.

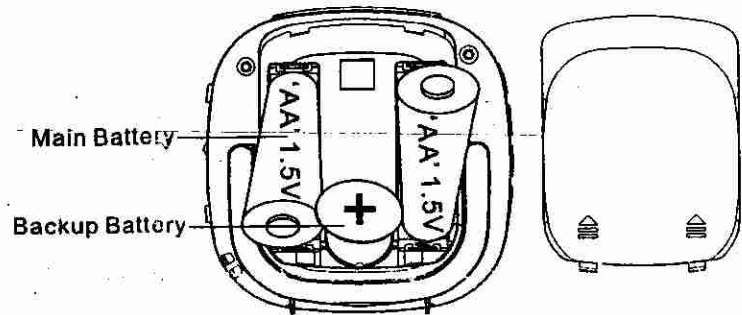

## Setting

### Swap between the Local time (T1) and second (T2)

Press the "Time" button to toggle between the Local time (T1) and second (T2). The display will show T1 or T2. The alarm will activate according to the display time.

### Display the alarm time (AL1/AL2)

Press the "Alarm" button to swap the display to show the alarm time AL1/AL2. Press "Time" button again to display time.

### Adjust the local time (T1):

- \* Press the "Time" button to swap the display to show the local time (T1).
- \* Press and hold the "time" button 3 seconds until the time blinking.
  - Press the "Hour" button to adjust the hour
  - Press "Minute" button to adjust the minute.
  - Press "SNOOZE" to swap 12/24 hour.
  - Press "Time" button again the exit the time set mode

### Adjust the second time(T2)

- \* Press the "Time" button to swap the display to show the second time. (T2)
- \* Press and hold the "time" button 3 seconds until the hour digits blinking.
  - Press the "Hour" button to adjust the hour. (You can not adjust the second time minute digits)
  - Press "Time" button again the exit the time set mode

### Set alarm time (AL1/AL2)

- \* Press the "Alarm" button to swap the display to show the alarm time AL1/AL2.
- \* Press and hold the "Alarm" button 3 seconds until the alarm time blinking. (AL1 or AL2)
  - Press the "Hour" button to adjust the hour of the alarm time.
  - Press "Minute" button to adjust the minute of the alarm time.
  - Press "Time" button again the exit the alarm set mode

**Back light**

Press the "SNOOZE/STOP" button once to turn on the back light for 20 seconds

**Test**

Press and hold the test to test the buzzer and vibrator setting

**Alarm on/off**

Slide the alarm1 or alarm2 switch to on or off position to turn the alarm on or off.

**Vibration / buzzer / Vib+Buzz**



Select the action when the alarm activate.

**Snooze**

Press "SNOOZE" button to delay the alarm 10 minute when alarm activate.

**Stop the alarm**

Press the snooze again while snooze activate to stop the alarm

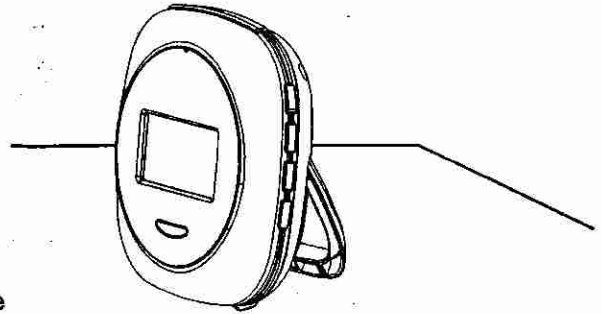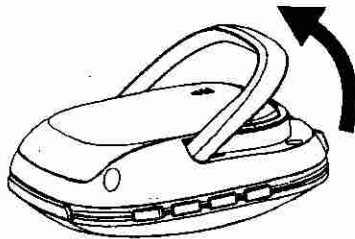**Put on the table**

Flip to open the stand and put it on the table

**Put under the pillow**

Set the alarm time and turn on the vibration function, Put the clock under the pillow. When the alarm is activate, it will shake the pillow.

